https://www.snkjcn.com

Youtube

SANNAN

Email: Kiki@szsnled.com

Phone: +8618576729248

https://www.snkjcn.com/

SANNAN DYNAMIC LIGHT BOX SOLUTION

Shenzhen San Nan Technology Co., Ltd.

Focus on the research and production of LED advertising light boxes' light sources

Provide an installation plan for LED light box lighting sources



https://www.snkjcn.com/

CONTENTS

Shenzhen San Nan Technology Co., Ltd.

SANNAN

01 Company profile
公司简介

P01 **Company profile**
P01 Certification



02 Dynamic light box
动感灯箱

P04 **LED Dynamic Signage Series**
P06 SN-P20-K2-RGB-CK
P08 SN-P20-K2-X-RGB
P09 SN-P25-H2-RGB+W
P10 SN-P30-H2-RGB+CW
P12 SN-P30-H-RGB+W
P13 SN-P30-H-RGB
P14 Full-color dynami Display light box Case Show

White light Display light box
P18 SN-P16-W-G
P21 SN-P20-A-W
P22 SN-P20-B-W
P23 SN-P30-C-W
P24 SN-P40-CW-CCT
P25 SN-P40-D-W
P26 SN-P10-F-W
P27 SN-P7.5-E-W
P28 White light Dynamic light box Case Show

03 Backlight strip
背光灯条

P34 **Backlight strip**
P35 SN-B101
P36 SN-B102
P37 SN-B103
P38 SN-B104
P39 SN-B105
P40 SN-B106
P41 SN-B107
P42 SN-B108

04 Side light strip
侧光灯条

P43 **Side light strips**
P44 SN-C401
P45 SN-C401X-4D-W
P47 SN-C402
P49 SN-C403
P51 SN-C404
P53 SN-C405
P55 SN-C406
P57 SN-C407
P59 Side light bar Double-sided light box

05 Control system
控制系统

P62 **Control system**
P63 SN-K501
P65 SN-K502
P67 SN-K503

06 Project case
工程案例

P70 **Project case**
P71 LED light box Effect display
P73 Front desk waterfall dynamic light box
P76 Bar counter RGB dynamic light box
P80 Reception hall dynamic light box
P81 Dual-color temperature adjustable light box
P84 Store display Light box
P86 Commercial street Decorative light boxes

07 Customized light box
定制灯箱

P88 **Ultra-thun light box**
P89 Ultra-thin projection light box
P94 Desktop light box
P96 **Outdoor light box**
P97 Flat light box
P99 Shrink film light box
P101 Square rotating light box
P103 Outdoor light box Effect display
P106 **Indoor light box**
P120 **luminous Character**
P126 **3D Holographic projection light box**

SANNAN



01 COMPANY PROFILE

Company profile

Shenzhen San Nan Technology Co., Ltd.

Shenzhen Sannan Technology Co., Ltd. is specilized in advertising light box and decoration lighting vision solution is a research and development, production, sales and service as one of the high-tech enterprises.

According to the production management concept of international standards, SanNan strictly controls product quality and various production management work. Products mainly use nichia, cree, osram, Taiwan Genesis and other international first-class led lamp beads and domestic first-class Sanan, Epistar LED lamp beads. All products have CE, RoHS, FCC UL BIS certification.

The main products of the company are dynamic light box,dynamic light panelled backlight bar, led edge light bar, led light strip and control system, widely used in airports, subways, high-speed rail, bus stations, jewelry, automobiles, mobile phones, catering, cosmetics, clothing, finance, oil, education and other industries advertising decorative lighting.

SanNan has a strong R& D team, adhere to innovative development, committed to providing you with quality lighting and visual solutions.

As of this year	Industry Experience	Excellent Examples	Engineering Support
2025	12	5000+	200+

CERTIFICATION 企业资质

Federal Communications Commission







Conformite Europeenne











UK Conformity Assessed



Restriction of Hazardous Substances







DYNAMIC LIGHT BOX

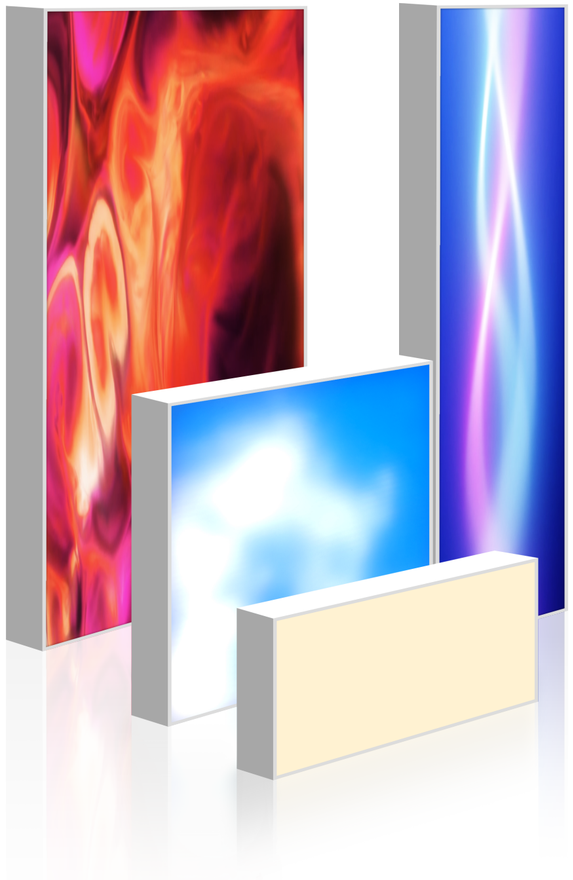

02 Dynamic Light Box

LED Dynamic Light box introduction

The LED dynamic light box is composed of light source and controller, which forms the animation ef combination with the advertising film, greatly improving the dissemination of advertising,
and canreali changeable creative advertising according to the designed animation, attracting the eye of customers.
LED singl work alone, flashing than the state of energy saving 70%, realize
the advertising energy saving and environ protection.

Custom process

01 Customers provide light box screen and size

02 Quote according to customer requirements

03 The client provides the original advertisement

04 Custimer pays 30% down payment

05 Make goods according to customer's light box

06 Provide animation effects for customers to confirm

07 Modify the effect according to customer requirements

08 Product testing and aging

09 Pay and delicer and provide installation drawings

LED Dynamic Light box introduction

Lamp panel introduction

- Dynamic RGB Light Series is mainly used in Storefront decoration, Background wall, Ceiling decoration, Clothing stores, company Showroom, Makeup shops, Stage activity, Beer stores, KTV, Hotel, Office signs and other indoor and outdoor events and places to render full color and comfortable environment. Dynamic White series includes Dynamic Light Panel, Light Bar and Controller.
- The smaller the spacing between the lamps, the more delicate and vivid the animation effect is displayed. Any light box size, shape, effect we can customize, indoor and outdoor can be produced, support the finished light box, light box materials shipped all over the world.



SN-P20-K2-RGB-CW

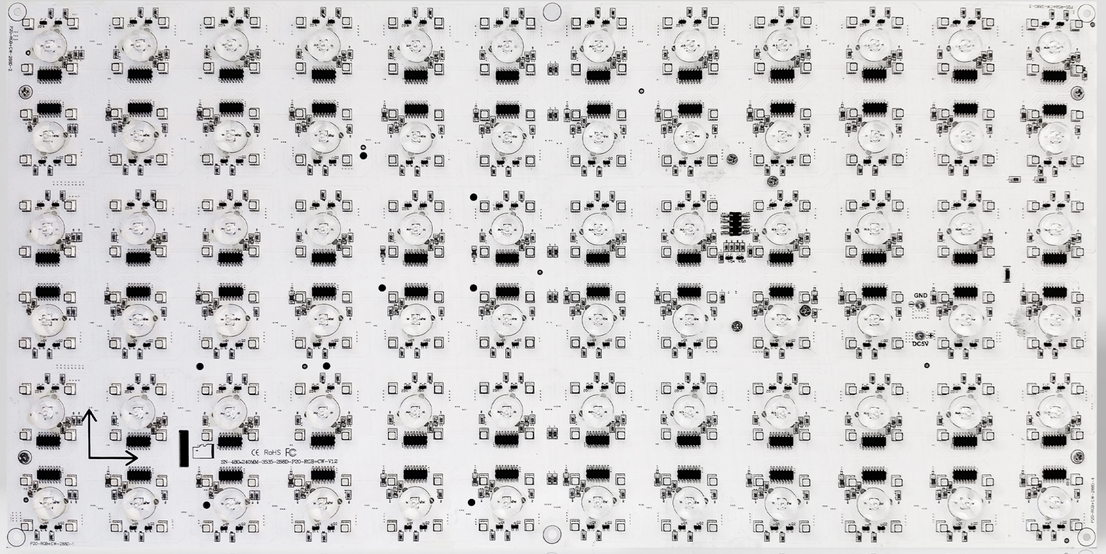

Product features.

- DC5V/DC12V low-voltage universal power supply, safe andreliable, constant current IC drive, good brightness consistency.
- Utilizes 1.5mm thick high thermal conductivity FR4 doublesided circuit board.
- External driver IC SMD3535 lamp beads, the color of thelight is highly consistent, and can achieve the full color display.
- SMD3030 CCT lamp beads are used to do the illuminationof the complementary light, the lamp has a high brightness, lowlight decay, good color uniformity, long life, etc.
- 170° large angle optical lens for white lightbeads scattering, so that the light plate luminous uniformityw yellow spot, so that the LED applicable lighting, notblinding.
- 20mm lamp beads spacing, running video detailed, can beused for8CM thick light box and indoor decorative lightingand ceiling lighting system.



Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P-20-K2-X-RGB+CW	RGB+CW (2700K-6500K)	DC5V	SMD3535+SMD3030	40W	480*240*1.5mm	⩾90	288+72 pcs
SN-P-20-K2-X-RGB+CW	RGB+CW (2700K-6500K)	DC5V	SMD3535+SMD3030	10W	240*120*1.5mm	⩾90	72+18 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P-20-K2-X-RGB+CW	20mm/40mm	IP20	120°	-40 ~ +60°C
	SN-P-20-K2-X-RGB+CW	20mm/40mm	IP20	120°	-40 ~ +60°C

SN-P20-K2-X-RGB

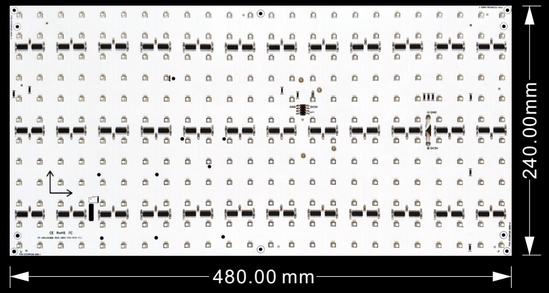

Product features.

- DC5V low voltage power supply, safe and reliable.constant current IC drive, brightness consistency
- Dopts 1.5mm thick high thermal conductivity aluminium substrate for heat dissipation, which improves the servicelife of the product
- Sing the external drive IC SMD3535 lamp beads, the colorof light is highly consistent, can realize the full true colordisplay.
- He spacing of lamp beads is 20mm, and the running animation is exquisite, which can be used for > 8CM thic klight box.
- Sub-control connection, each light panel worksindividually, convenient for maintenance and installation.
- Single point single control, no screen flicker, not dazzling.conducive to viewing.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P-20-K2-X-RGB	RGB	DC5V	SMD3535	40W	480*240*1.5mm	⩾80	288 pcs
SN-P-20-K2-X-RGB	RGB	DC5V	SMD3535	10W	240*120*1.5mm	⩾80	72 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P-20-K2-X-RGB	20mm	IP20	120°	-40 ~ +60°C
	SN-P-20-K2-X-RGB	20mm	IP20	120°	-40 ~ +60°C

SN-P30-H-RGB-TTL

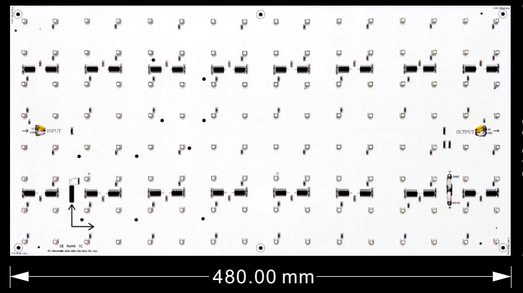

Product features.

- DC5V low voltage power supply, safe and reliable,.constant current IC drive, good brightness consistency.
- 1.5mm thick high thermal conductivity aluminumsubstrate heat dissipation, improve the product life.Life.
- Using external driver IC SMD3535 lamp beads, light coloris highly consistent, can achieve full color display.It canrealize full true color display.
- 170° large angle optical lens for white light beadsscattering, so that the light board uniform light-emitting Noyellow spot. Make the LED suitable for lighting, not blinding.
- Lamp bead spacing 30mm, running video detailed, can beused for >8cm thick light box and indoor decorative lightingand ceiling lighting system.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P30-H-RGB-TTL	RGB	DC5V	SMD3535	35W	480*240*1.5mm	⩾80	128 pcs
SN-P30-H-RGB-TTL	RGB	DC5V	SMD3535	10W	240*120*1.5mm	⩾80	32 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P30-H-RGB-TTL	30mm	IP20	120°	-40 ~ +60°C
	SN-P30-H-RGB-TTL	30mm	IP20	120°	-40 ~ +60°C

SN-P30-H2-RGB+CW

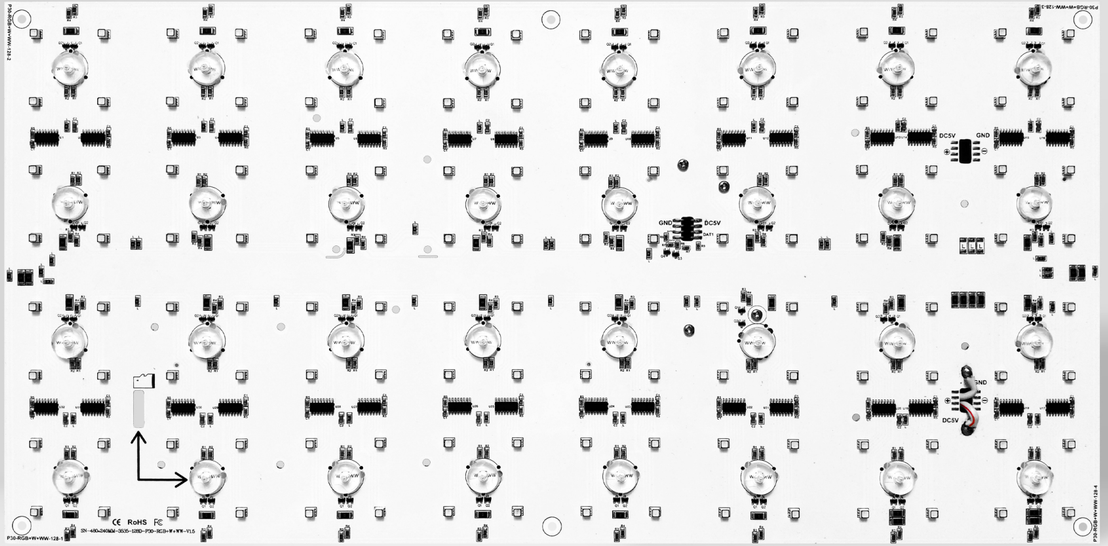

SANNAN

Product features.

- DC5V low voltage power supply, safe and reliable.constant current IC drive, good brightness consistency.
- 1.5mm thick high thermal conductivity aluminumsubstrate heat dissipation, improve the product life.Life.
- Using external driver IC SMD3535 lamp beads, light coloris highly consistent, can achieve full color display.It canrealize full true color display.
- SMD 3030 white light beads are used as lighting fll light,the beads have high brightness, low light decay and colorconsistency.The lamp beads have high brightness, low light decay, goodcolor consistency, long life, etc.
- 170°large angle optical lens for white light beadsscattering, so that the light board uniform light-emittingNo yellow spot. Make the LED suitable for lighting, notblinding.
- Lamp bead spacing 30mm, running video detailed, can beused for >8cm thick light box and indoor decorative lightingand ceiling lighting system.



Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P30-H2-RGB+CW	RGB+CW (3000K-6500K)	DC5V	SMD3535+SMD3030	35W/32W	480*240*1.5mm	⩾80	128+72 pcs
SN-P30-H2-RGB+CW	RGB+CW (3000K-6500K)	DC5V	SMD3535+SMD3030	10W/8W	240*120*1.5mm	⩾80	32+8 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P30-H2-RGB+CW	30mm/60mm	IP20	120°+170°	-40 ~ +60°C
	SN-P30-H2-RGB+CW	30mm/60mm	IP20	120°+120°	-40 ~ +60°C

SN-P30-H2-RGB+W

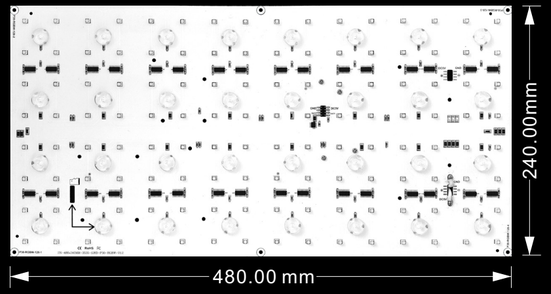

Product features.

- DC5V low voltage power supply, safe and reliable,.constant current IC drive, good brightness consistency.
- 1.5mm thick high thermal conductivity aluminumsubstrate heat dissipation, improve the product life.Life.
- Using external driver IC SMD3535 lamp beads, light coloris highly consistent, can achieve full color display.It canrealize full true color display.
- SMD 2835 white light beads are used as lighting fll light,the beads have high brightness, low light decay and colorconsistency.The lamp beads have high brightness, low lightdecay, good color consistency, long life, etc. 5.
- 170° large angle optical lens for white light beadsscattering, so that the light board uniform light-emitting Noyellow spot. Make the LED suitable for lighting, not blinding.
- Lamp bead spacing 30mm, running video detailed, can beused for >8cm thick light box and indoor decorative lightingand ceiling lighting system.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P30-H2-RGB+W	RGB+W (4000K/5000K/8000K)	DC5V	SMD3535+SMD2835	35W/32W	480*240*1.5mm	⩾90	128+32 pcs
SN-P30-H2-RGB+W	RGB+W (4000K/5000K/8000K)	DC5V	SMD3535+SMD2835	10W/8W	240*120*1.5mm	⩾90	32+8pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P30-H2-RGB+W	30mm/60mm	IP20	120°+170°	-40 ~ +60°C
	SN-P30-H2-RGB+W	30mm/60mm	IP20	120°+170°	-40 ~ +60°C

SN-P30-H-RGB

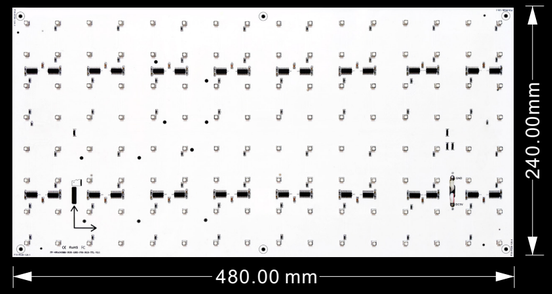

Product features.

- DC5V low voltage power supply, safe and reliable,.constant current IC drive, good brightness consistency.
- 1.5mm thick high thermal conductivity aluminumsubstrate heat dissipation, improve the product life.Life.
- Using external driver IC SMD3535 lamp beads, light coloris highly consistent, can achieve full color display.It canrealize full true color display.
- 170° large angle optical lens for white light beadsscattering, so that the light board uniform light-emitting Noyellow spot. Make the LED suitable for lighting, not blinding.
- Lamp bead spacing 30mm, running video detailed, can beused for >8cm thick light box and indoor decorative lightingand ceiling lighting system.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P30-H-RGB	RGB	DC5V	SMD3535	35W	480*240*1.5mm	⩾80	128 pcs
SN-P30-H-RGB	RGB	DC5V	SMD3535	10W	240*120*1.5mm	⩾80	32 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P30-H-RGB	30mm	IP20	120°	-40 ~ +60°C
	SN-P30-H-RGB	30mm	IP20	120°	-40 ~ +60°C



Full-color dynamic Display light box

The full-color dynamic light box is an intelligent lighting device that is precisely controlled by a program, capable of presenting millions of colors and achieving rich dynamic visual effects. It is an excellent tool for creating an ultimate atmosphere and attracting attention visually.

SANNAN



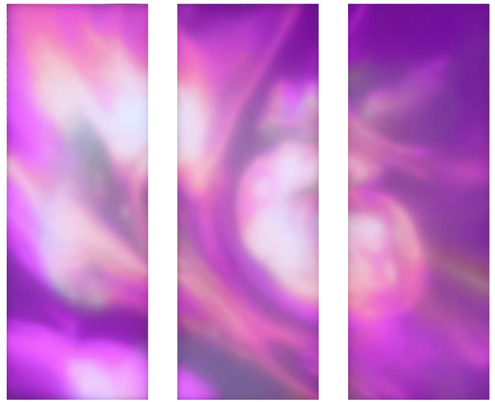

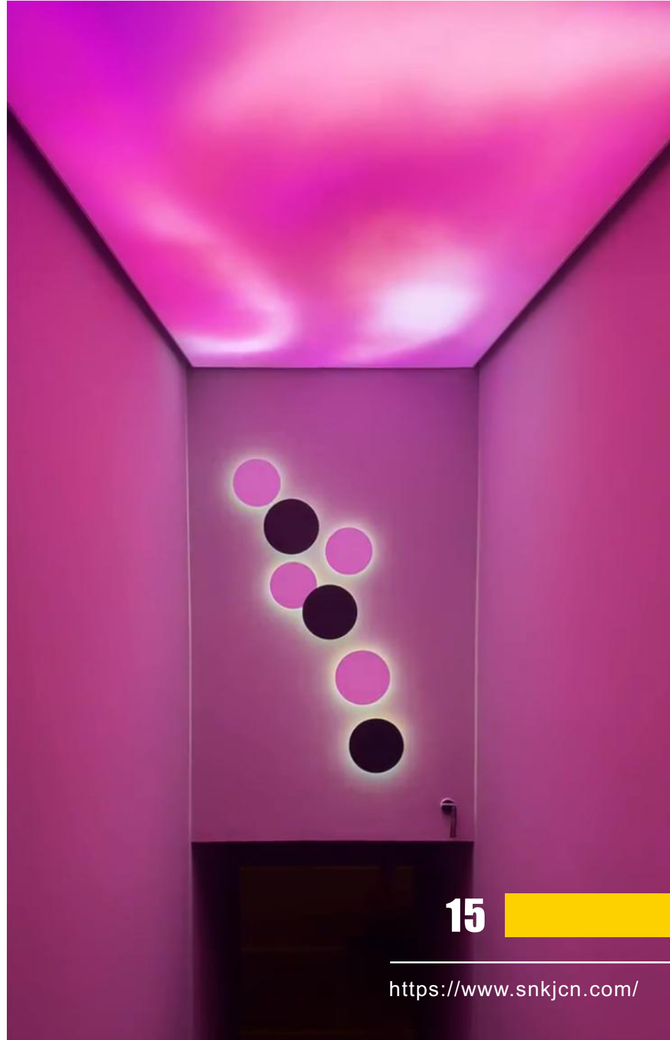





Full-color dynamic Display light box

The full-color dynamic light box is an intelligent lighting device that is precisely controlled by a program, capable of presenting millions of colors and achieving rich dynamic visual effects. It is an excellent tool for creating an ultimate atmosphere and attracting attention visually.

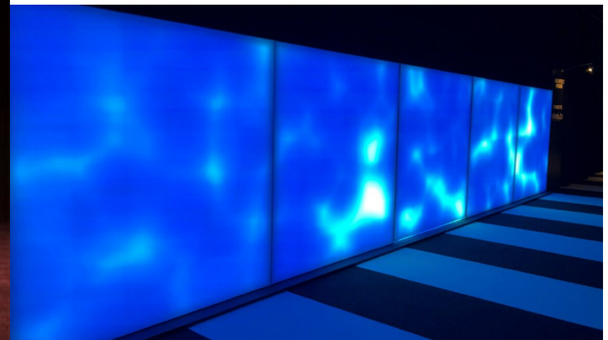



SN-P16-W-G

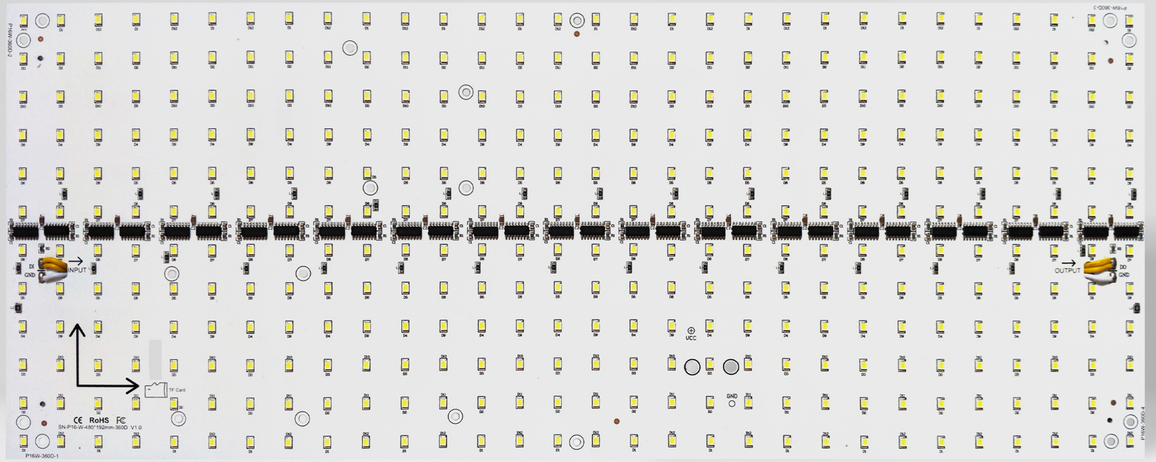

Product features.

- DC5V low voltage power supply, safe and reliable, constant current IC drive, good brightness consistency.
- Adopt 1.6mm thick and high thermal conductivity aluminum substrate to dissipate heat and improve the service life ofthe product.
- Use 3V SMD2835, high brightness, low light decay, good color, long life.
- The lamp beads are 1.6CM apart, and the running animation is quite delicate, which can be used for > 6CM thick light box.
- Each lamp bead works alone, damage one will not affect the operation of other lamp bead, no maintenance.

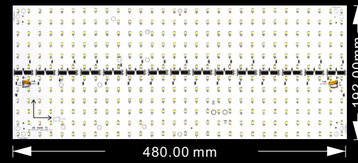



Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	lm/Heart	Length(mm)	LED Qty
SN-P16-W-G-360	6000K	DC5V	SMD2835	31W	20	480*192*1.2mm	360 pcs
SN-P16-W-G-120	6000K	DC5V	SMD2835	10.5W	20	160*792*1.2mm	120 pcs
SN-P16-W-G-60	6000K	DC5V	SMD2835	5.5W	20	960*15*1.2mm	60 pcs



SN-P20-A-W

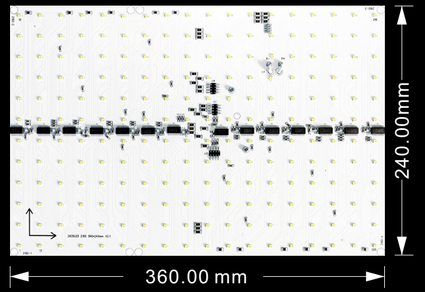

Product features.

- DC12V low voltage power supply, safe and reliable, constant current IC drive, good brightness consistency.
- Adopt 1.6mm thick and high thermal conductivity aluminum substrate to dissipate heat and improve the service life ofthe product.
- Use 9V SMD2835, high brightness, low light decay, good color, long life.
- The lamp beads are 2CM apart, and the running animation is quite delicate, which can be used for > 6CM thick light box.
- Each lamp bead works alone, damage one will not affect the operation of other lamp bead, no maintenance.

Dynamic light box unit plate structure map

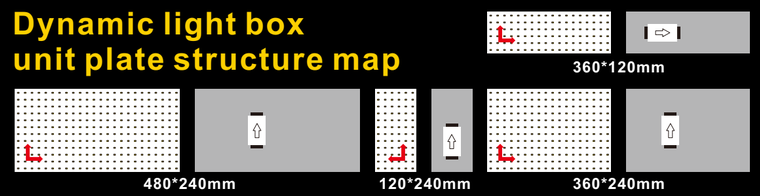

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	lm/Heart	Length(mm)	LED Qty
SN-P20-A-W-288	7000-8000K	DC12V	SMD2835	40W	20	480*240*1.5mm	288 pcs
SN-P20-A-W-216	7000-8000K	DC12V	SMD2835	30W	20	360*240*1.5mm	216 pcs
SN-P20-A-W-108	7000-8000K	DC12V	SMD2835	15W	20	360*120*1.5mm	108 pcs
SN-P20-A-W-72	7000-8000K	DC12V	SMD2835	10W	20	240*120*1.5mm	72 pcs

SN-P20-B-W

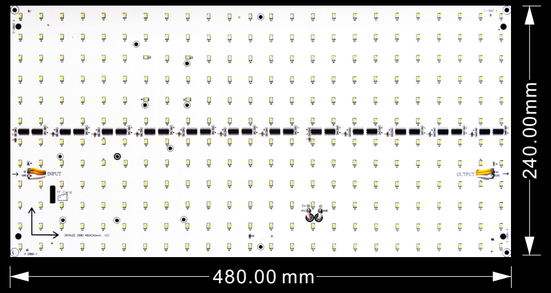

Product features.

- DC5V low voltage power supply, safe and reliable, constant current iC drive, good brightness consistency.
- Adopt 1.6mm thick and high thermal conductivity aluminum substrate to dissipate heat and improvethe service life of the product.
- Use 3V SMD2835, high brightness, low lightdecay, good color, long life.
- The lamp beads are 2CM apart, and the runninganimation is quite delicate, which can be used for >6CM thick light box.
- Each light bulb operates independently. Even if one bulb is damaged, it will not affect the operation of the other bulbs. It is maintenance-free.





Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-P20B-W-288	6000K	DC5V	SMD2835	25W	480*240*1.2mm	20	288 pcs
SN-P20B-W-72	6000K	DC5V	SMD2835	7.5W	240*120*1.2mm	20	72pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P20B-W	20mm	IP33	120°	-40 ~ +60°C
	SN-P20B-W	20mm	IP33	120°	-40 ~ +60°C

SN-P30-C-W

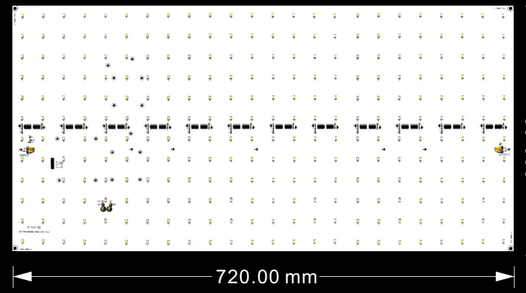

Product features.

- DC12V low voltage power supply, safe and reliable, constant current IC drive, good brightness consistency.
- Adopt 1.2mm thick and high thermal conductivity aluminum substrate to dissipate heat and improve the service life of theproduct.
- Use 9V SMD2835, high brightness, low light decay, good color, long life.
- The lamp beads are 3CM apart, and the running animation isquite delicate, which can be used for > 8CM thick light box.
- The requirements of the light box size is relatively large,costeffective





Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-P30-C-W-288	3000~8000K	DC12V	SMD2835	62W	720*360*1.2mm	20	288 pcs
SN-P30-C-W-216	3000~8000K	DC12V	SMD2835	42W	480*360*1.2mm	20	216 pcs
SN-P30-C-W-144	3000~8000K	DC12V	SMD2835	31W	360*360*1.2mm	20	144 pcs
SN-P30-C-W-96	3000~8000K	DC12V	SMD2835	21W	360*240*1.2mm	20	96 pcs
SN-P30-C-W-72	3000~8000K	DC12V	SMD2835	16W	360*180*1.2mm	20	72 pcs

SN-P40-CW-CCT

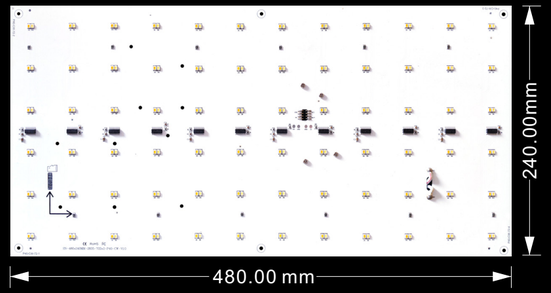

Product features.

- DC12V low voltage power supply, safe and reliable.constant current IC drive, good brightness consistency.
- 1.5mm thick high thermal conductivity aluminumsubstrate heat dissipation, improve the service life of theproduct.
- Using high brightness SMD2835 lamp beads, the lightcolor is highly consistent, can realize the full color display
- Bad point renewal program, suitable for indoor lightingand scenario animation mode; SPWM grayscale level:65536 levels, OUT PWM frequency up to 18KHzeffectively solve the picture or video camera "strobe"problem.
- Each lamp bead works individually, damage to one doesnot affect the operation of other lamp beads, maintenance-free.
- 40mm lamp bead spacing, running video detailed, canbe used for >8CM thick light box and indoor decorativelighting and ceiling lighting system.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	LED Qty
SN-P40-CW-CCT-72	2700-6500K	DC12V	SMD2835	25W	480*240*1.2mm	⩾90	CW:72 pcs
SN-P40-CW-CCT-18	2700-6500K	DC12V	SMD2835	7W	240*120*1.2mm	⩾90	CW:18 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P40-CW-CCT-72	40mm	IP20	120°+178°	-40 ~ +60°C
	SN-P40-CW-CCT-18	40mm	IP20	120°+178°	-40 ~ +60°C

SN-P40-D-W



Product features.

- DC12V low voltage power supply, safe and reliable, constantcurrent IC drive, good brightness consistency.
- Adopt 1.2mm thick high thermal conductivity aluminumsubstrate heat dissipation plus heat dissipation aluminum profleshell, improve the service life and durability of the product.
- Use 9V SMD2835, high brightness, low light decay, good color,long life.
- The lamp beads are 4CM apart, and the running animation isquite delicate, which can be used for > 8CM thick light box.
- Suitable for irregular light box, various sizes, flexible installation,low price.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	Im/Heart	LED Qty
SN-P40-3D-W-24	3000~8000K	DC12V	SMD2835	5W	960*15*1.2mm	20	24 pcs
SN-P40-3D-W-18	3000~8000K	DC12V	SMD2835	4W	720*15*1.2mm	20	18 pcs
SN-P40-3D-W-12	3000~8000K	DC12V	SMD2835	3W	480*15*1.2mm	20	12 pcs
SN-P40-3D-W-9	3000~8000K	DC12V	SMD2835	2W	360*15*1.2mm	20	9 pcs

SN-P10-F-W



Product features.

- DC5/12V low voltage power supply, safe and reliable, constantcurrent IC drive, good brightness consistency.
- Adopt 1.6mm thick double-sided glass fiber board FR4international material for heat dissipation, better heat dissipationperformance.
- Use 3V SMD2835, high brightness, low light decay, good color,long life.
- Lamp bead spacing 10mm, run fne animation, can be used for>3CM thick light box.







Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	CRI	lm/Heart	LED Qty
SN-P10-F-W-5	6000K	DC5V	SMD2835	10W	320*320*1.0mm	⩾80	1.5 lm	1024 pcs
SN-P10-F-W-12	6000K	DC12V	SMD2835	15W	320*320*1.5mm	⩾80	2 lm	1024pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P10-F-W	10mm	IP33	120°	-40 ~ +60°C

SN-P7.5-E-W

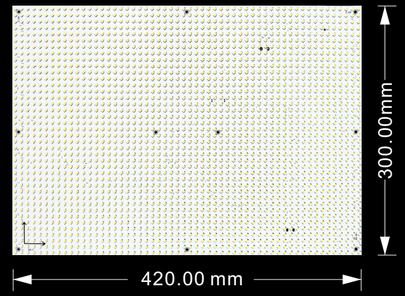

Product features.

- DC5V/12V low voltage power supply, safe andreliable, constant current IC drive, good brightnessconsistency.
- Adopt 1.6mm thick double-sided glass fber boardFR4 international material for heat dissipation, betterheat dissipation performance.
- Use 3V SMD2835, high brightness, low lightdecay, good color, long life.
- Lamp bead spacing 7.5mm, run fne animation, canbe used for >2.5CM thick light box.





Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	Im/Heart	LED Qty
SN-P7.5-E-W-5	3000-8000K	DC5V	SMD2835	15W	420*300*1.5 mm	20	2240 pcs
SN-P7.5-E-W-12	3000-8000K	DC12V	SMD2835	15W	420*300*1.5 mm	20	2240 pcs

Others	Part NO.	Spacing lamp beads	IP rank	Lrritation angle	Work environment
	SN-P7.5-E-W	7.5 mm	IP33	120°	-40 ~ +60°C



White light Dynamic light box

A modern light box with a single color temperature of white light combined with programmable dynamic effects. It eliminates the complexity of colors and focuses on shaping the spatial sense through the movement, form and changes in light and shade, creating an extremely minimalist, sophisticated and technologically advanced visual experience.





SANNAN

White light
Dynamic light box

A modern light box with a single color temperature of white light combined with programmable dynamic effects. It eliminates the complexity of colors and focuses on shaping the spatial sense through the movement, form and changes in light and shade, creating an extremely minimalist, sophisticated and technologically advanced visual experience.



White light
Dynamic light box

A modern light box with a single color temperature of white light combined with programmable dynamic effects. It eliminates the complexity of colors and focuses on shaping the spatial sense through the movement, form and changes in light and shade, creating an extremely minimalist, sophisticated and technologically advanced visual experience.







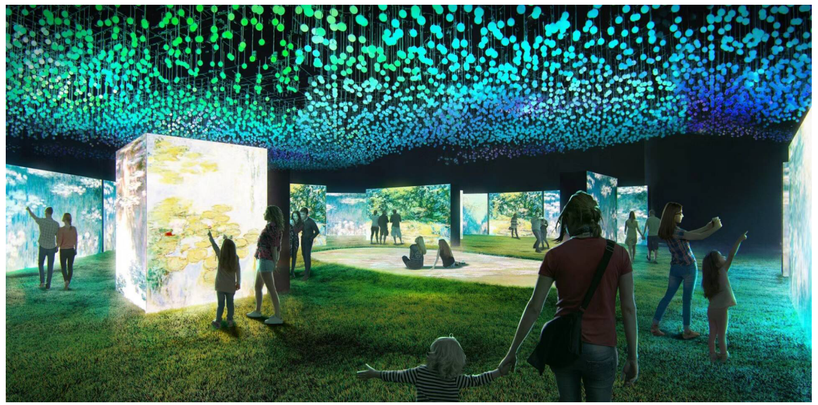



BACKLIGH T STRIP

03 Backlight strip

LED Backlight Light box introduction

Backlight bar is composed of 2835 or 3030 lamp beads and difuse relection lens, which dissipates heat througl aluminum substrate, It is usually used in > 4CM light box with uniform surface and no yellow spols. it is an ideal lighsource for advertising light box and the most widely used light source.

Custom process

01 Customer provides parameters or samples

02 Quoted prices according to the materials required by customers

03 Confirm the appearance and bead parameters

04 Customer payment opening board,lamp bead proofing

05 Provide samples to customers

06 Customers determine parameters and efects

07 Do dhe goods

SN-B101-Waterproof

LED backlight strip series

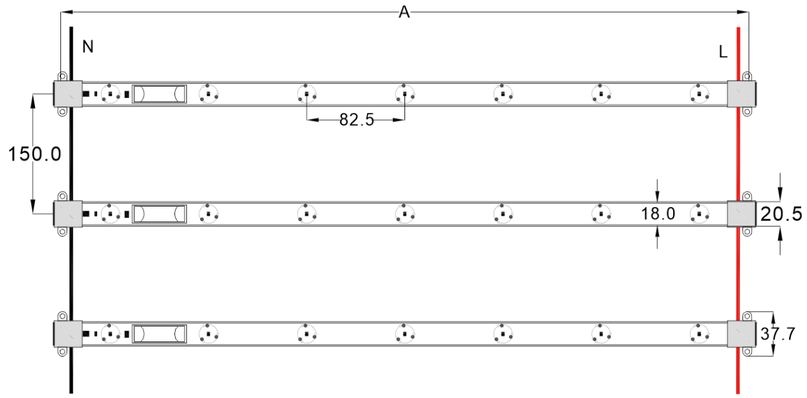







Product features.

- AC110V-280V mains power input, no switchingpower supply, constant current IC drive, high effciency, no strobe, good brightness consistency.
- Fire retardant shell, touchable, safe and reliable,maintenancefree.
- The light source is SMD3030, which encapsulatesthree 10*30 luminescent chips with high brightness,low light decay, good color and long life.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular.
- High thermal conductivity aluminum substratewith a thickness of 1.2mm provides reliable heatdissipation for light source and improves productife.
- 3000W without power continuation, high powerefhciency, easy installation.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B101-6D	2700-12000K	AC110~280V	SMD3030	6W	500*20.5mm	120	6 pcs
SN-B101-7D	2700-12000K	AC110~280V	SMD3030	7W	580*20.5mm	120	7 pcs
SN-B101-9D	2700-12000K	AC110~280V	SMD3030	9W	745*20.5mm	120	9 pcs
SN-B101-11D	2700-12000K	AC110~280V	SMD3030	11W	915*20.5mm	120	11 pcs
SN-B101-12D	2700-12000K	AC110~280V	SMD3030	12W	1000*20.5mm	120	12 pcs

SN-B102

LED backlight strip series

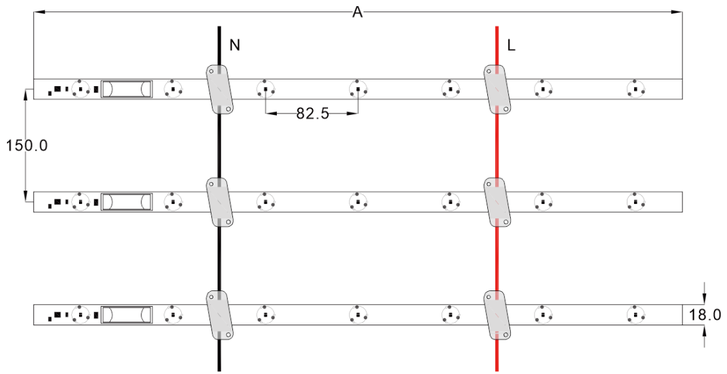

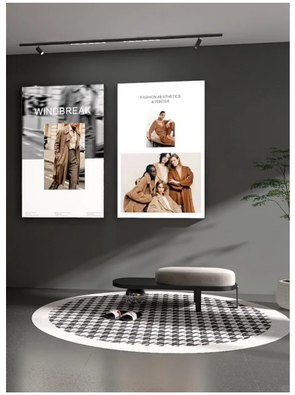

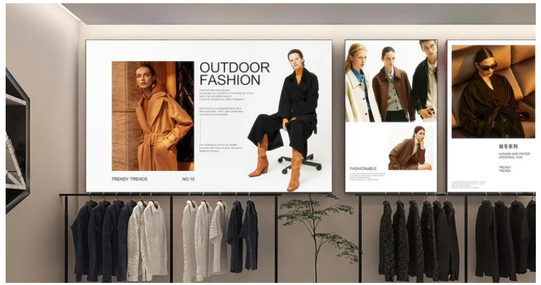

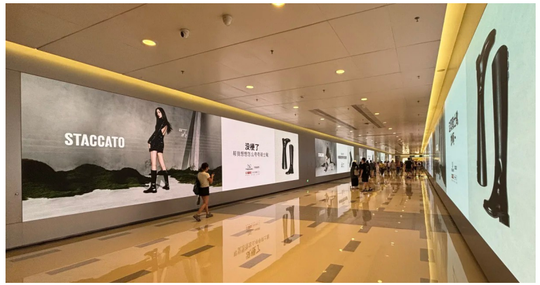

Product features.

- AC110V-280V mains power input, no switc hingpower supply, constant current IC drive, high effciency,no strobe, good brightness consistency.
- Fire retardant shell, touchable, safe and reliable.maintenancefree.
- The light source is SMD3030, which encapsulatesthree 10*30 luminescent chips with high brightnesslow light decay, good color and long life.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular.
- High thermal conductivity aluminum substrate witha thickness of 1.2mm provides reliable heat dissipationfor light source and improves product life.
- 3000W without power continuation, high powerefhciency, easy installation.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B102-6D	2700-12000K	AC110~280V	SMD3030	6W	495*18mm	120	6 pcs
SN-B102-7D	2700-12000K	AC110~280V	SMD3030	7W	578*18mm	120	7 pcs
SN-B102-9D	2700-12000K	AC110~280V	SMD3030	9W	743*18mm	120	9 pcs
SN-B102-11D	2700-12000K	AC110~280V	SMD3030	11W	908*18mm	120	11 pcs
SN-B102-12D	2700-12000K	AC110~280V	SMD3030	12W	990*18mm	120	12 pcs

SN-B103

LED backlight strip series

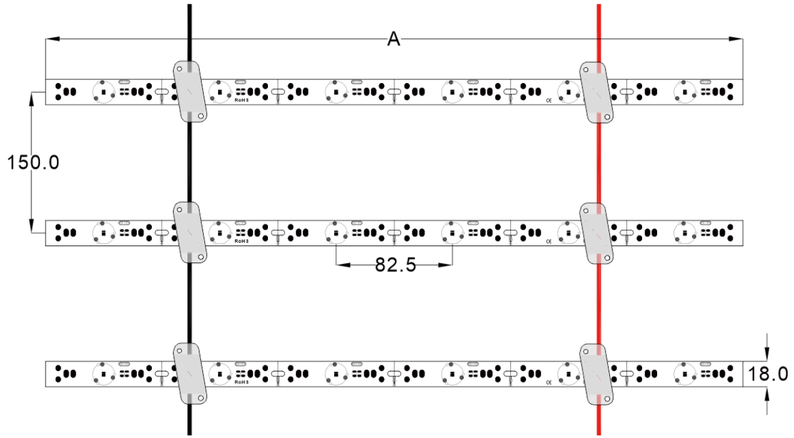

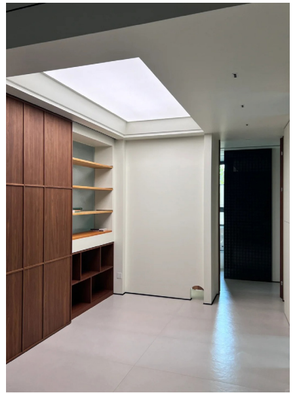





Product features.

- DC12V/24V constant voltage power supply, each lampworks alone, single lamp can be cut, high utilization rate.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular
- The light source adopts SMD3030, packaging wafer14*28 light emitting chip three, high brightness, low lightdecay, good color, long life, good stability.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation forlight source and improves product life.
- Low pressure work, widely used environment, strongsafety and reliability.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B103-6D	2700-12000K	DC12V	SMD3030	6W	495*18mm	130	6 pcs
SN-B103-12D	2700-12000K	DC12V	SMD3030	12W	990*18mm	130	12 pcs
SN-B103-6D	2700-12000K	DC24V	SMD3030	6W	495*18mm	130	6 pcs
SN-B103-12D	2700-12000K	DC24V	SMD3030	12W	990*18mm	130	12 pcs

SN-B104-Waterproof

LED backlight strip series

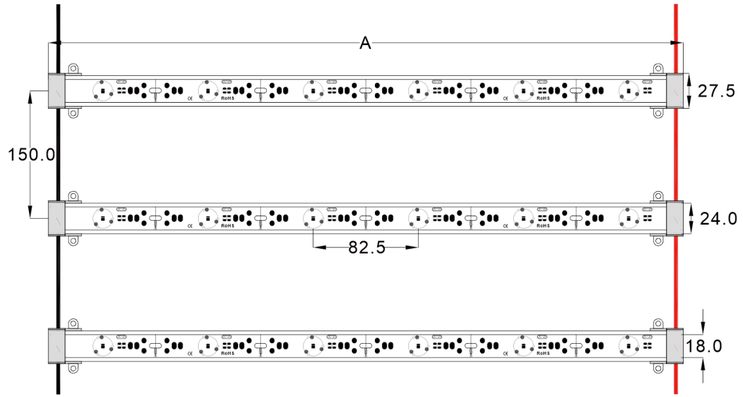







Product features.

- DC12V/24V constant voltage power supply,each lamp works alone, single lamp can be cut, high utilization rate.
- 175°TV large Angle diffuse reflection opticallens, uniform light effect without macular.
- The light source adopts SMD3030, packagingwafer 14*28 light emitting chip three, high brightness, low light decay, good color, long life,good stability.
- 175°TV large Angle diffuse reflection opticallens, uniform light effect without macular.
- 6063 aviation aluminum profile heatdissipation, silicone waterproof, effectively solve the problem of waterproof heat dissipation.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B104-6D	2700-12000K	DC12V	SMD3030	6W	495*27.5mm	130	6 pcs
SN-B104-12D	2700-12000K	DC12V	SMD3030	12W	990*27.5mm	130	12 pcs
SN-B104-6D	2700-12000K	DC24V	SMD3030	6W	495*27.5mm	130	6 pcs
SN-B104-12D	2700-12000K	DC24V	SMD3030	12W	990*27.5mm	130	12 pcs

SN-B105

LED backlight strip series

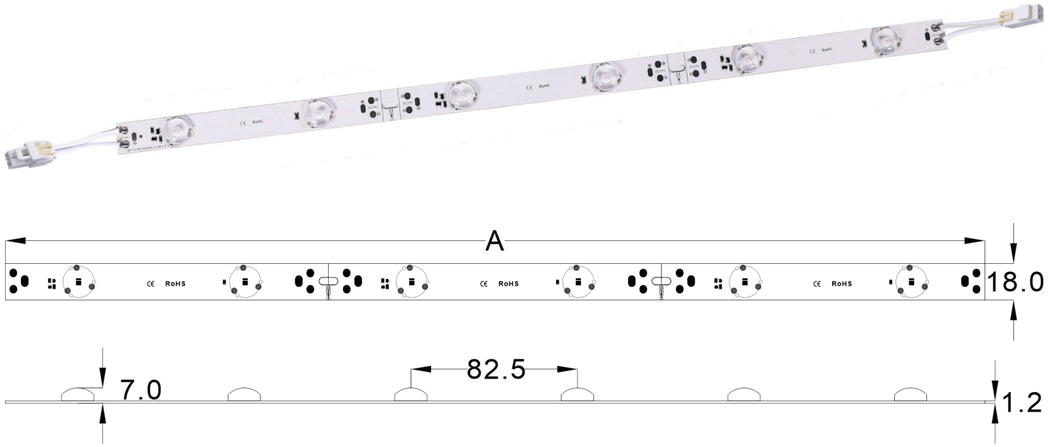





Product features.

- DC24V constant voltage single head power supply, triodeconstant current drive, two lamps a shear, high utilizationrate, good consistency.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular
- The light source is osram SMD3030, high brightness, lowlight decay, good color uniformity, long life, good stability.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation forlight source and improves product life.
- Low pressure work, widely used environment, strongsafety and reliability.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B105-6D	2700-12000K	DC24V	SMD3030	6W	495*18mm	135	6 pcs
SN-B105-8D	2700-12000K	DC24V	SMD3030	8W	660*18mm	135	8 pcs
SN-B105-10D	2700-12000K	DC24V	SMD3030	10W	825*18mm	135	10 pcs
SN-B105-12D	2700-12000K	DC24V	SMD3030	12W	990*18mm	135	12 pcs

SN-B106

LED backlight strip series

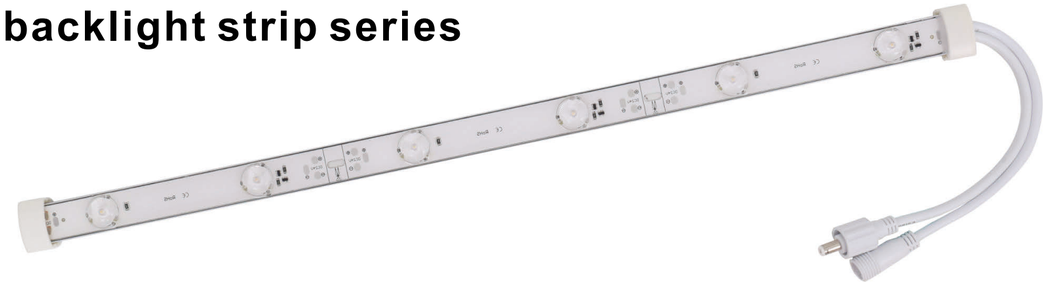

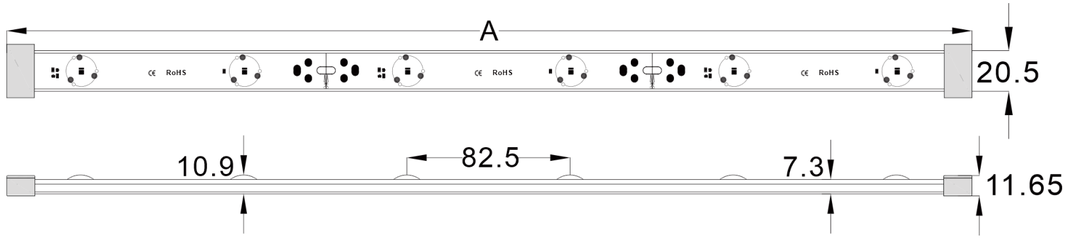





Product features.

- DC24V constant voltage single head power supply, triodeconstant current drive, two lamps and one shear, highutilization rate, good consistency.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular.
- The light source is osram SMD3030, high brightness, lowlight decay, good color uniformity, long life, good stability.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation forlight source and improves product life.
- Adopt 6063 aviation aluminum profile for heatdissipation, silicone waterproof, effectively solve theproblem of waterproof heat dissipation.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B106-6D	2700-12000K	DC24V	SMD3030	6W	515*20.5mm	135	6 pcs
SN-B106-8D	2700-12000K	DC24V	SMD3030	8W	680*20.5mm	135	8 pcs
SN-B106-10D	2700-12000K	DC24V	SMD3030	10W	845*20.5mm	135	10 pcs
SN-B106-12D	2700-12000K	DC24V	SMD3030	12W	1010*20.5mm	135	12 pcs

SN-B107

LED backlight strip series

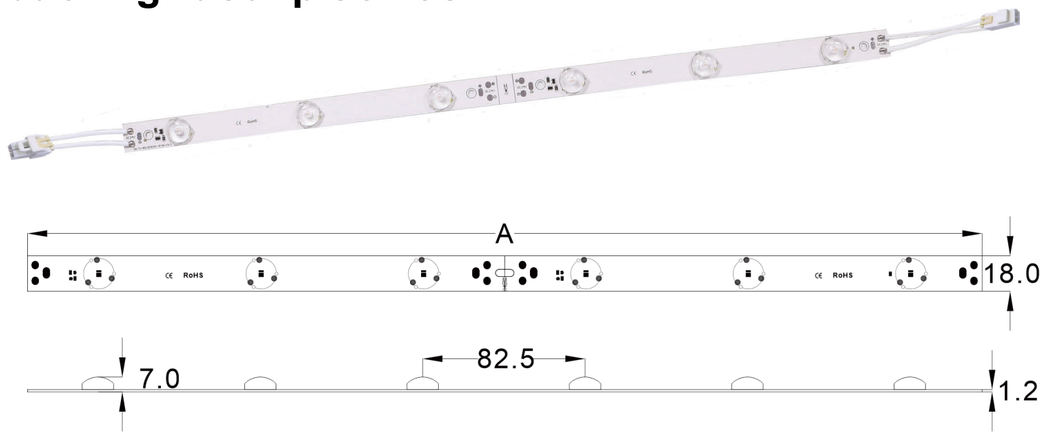



Product features.

- DC24V constant voltage single head power supply, triodeconstant current drive, three lamps and one shear, highefhciency, good consistency.
- 175°TV large Angle diffuse reflection optical lens,uniform light effect without macular
- The light source is osram SMD3030, high brightness, lowlight decay, good color uniformity, long life, good stability.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation forlight source and improves product life.
- Low pressure work, widely used environment, strongsafety and reliability.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B107-3D	2700~12000K	DC24V	SMD3030	3W	248*18mm	135	3 pcs
SN-B107-6D	2700~12000K	DC24V	SMD3030	6W	495*18mm	135	6 pcs
SN-B107-9D	2700~12000K	DC24V	SMD3030	9W	742*18mm	135	9 pcs
SN-B107-12D	2700~12000K	DC24V	SMD3030	12W	990*18mm	135	12 pcs

SN-B108

LED backlight strip series



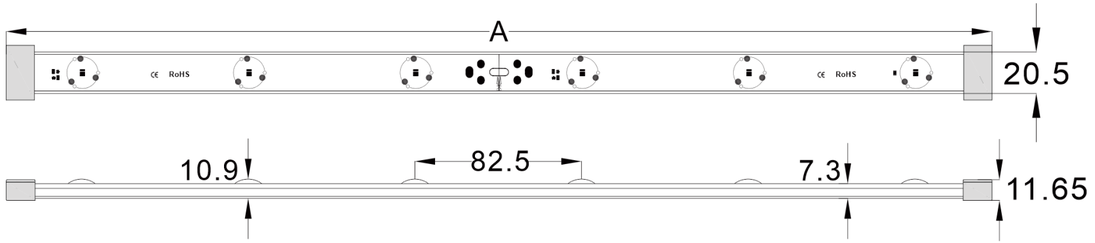

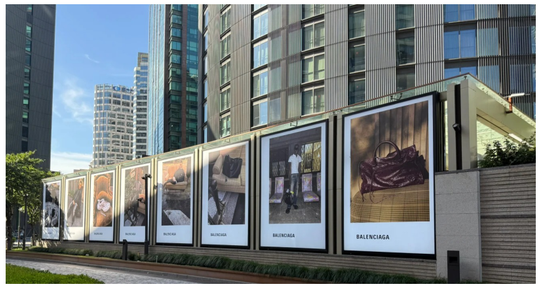

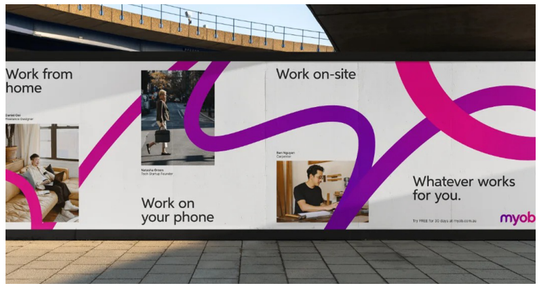

Product features.

- DC24V constant voltage single head power supply, triode constant current drive, three l amps and one shear, highefhciency, good consistency.
- 175°TV large Angle diffuse reflection optical lens.uniform light effect without macular.
- The light source is osram SMD3030, high brightness, lowlight decay, good color uniformity, long life, good stability.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation for light source and improves product life.
- Adopt 6063 aviation aluminum profile for heatdissipation,silicone waterproof, effectively solve theproblem of waterproof heat dissipation.

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-B108-3D	2700~12000K	DC24V	SMD3030	3W	268*20.5mm	135	3 pcs
SN-B108-6D	2700~12000K	DC24V	SMD3030	6W	515*20.5mm	135	6 pcs
SN-B108-9D	2700~12000K	DC24V	SMD3030	9W	762*20.5mm	135	9 pcs
SN-B108-12D	2700~12000K	DC24V	SMD3030	12W	1010*20.5mm	135	12 pcs

04 Side light strips

LED Edge linght bar introduction

Edge light bar is composed of high-power, high-flow lamp beads and optical lens, and dissipates heat through thealuminum substrate with high thermal conductivity. It is usually used in the double-sided light box larger than 6CMwith two sides facing each other, convenient installation and even surface without yellow spots. it is an ideal lighsource for advertising light boxes at present.



SIDE LIGHT STRIPS

Custom process

- 01 Customer provides parameters or samples
- 02 Quoted prices according to the materials required by customers
- 03 Confirm the appearance and bead parameters
- 04 Customer payment opening board,lamp bead proofing
- 05 Provide samples to customers
- 06 Customers determine parameters and efects
- 07 Do dhe goods

SN-C401

LED edge Light Barseries

Product features.

- Ac110v-280v mains power input, no switching powersupply, constant current IC drive, high effciency, no strobe,good brightness consistency.
- The use of fire retardant cover, cover the electroniccomponents, to provide product safety.
- The light source adopts SMD3030, packaging wafer14*28 light emitting chip three, high brightness, low lightdecay, good color, long life, good stability.
- An optical lens of 10X60° is adopted to scatter light fromtwo directions, ensuring the uniformity of the light source,no macula, and the irradiation distance up to 1.5m.
- High thermal conductivity aluminum substrate with athickness of 1.2mm provides reliable heat dissipation forlight source and improves product life.
- 3000W without power continuation, high powerefhciency and easy installation.

SANNAN



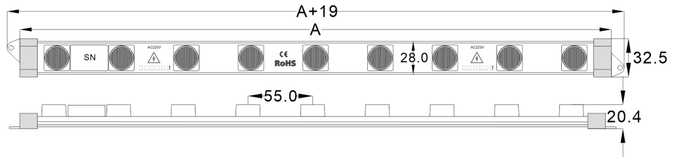



Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C401-9D-W	2700-12000K	AC110~280V	SMD3030	11W	500*32.5mm	130	9 pcs
SN-C401-18D-W	2700-12000K	AC110~280V	SMD3030	22W	1000*32.5mm	130	18 pcs
SN-C401-9D-C	2700-12000K	AC110~280V	SMD3030	11W	500*32.5mm	130	9 pcs
SN-C401-18D-C	2700-12000K	AC110~280V	SMD3030	22W	1000*32.5mm	130	18 pcs

SN-C401X-4D-W



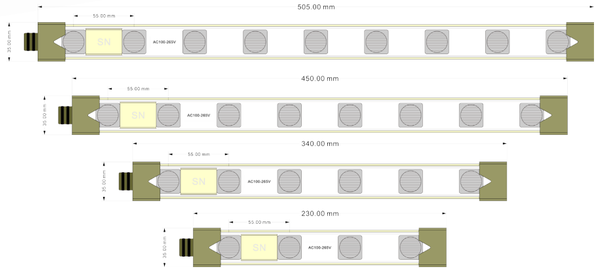

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	Lrritation angle	LED Qty
SN-C401X-4D-W	2700-12000K	AC100~265V	SMD3030	5W	230*35mm	10*60°	4 pcs
SN-C401X-6D-W	2700-12000K	AC100~265V	SMD3030	7.5W	340*35mm	10*60°	6 pcs
SN-C401X-8D-W	2700-12000K	AC100~265V	SMD3030	10W	450*35mm	10*60°	8 pcs
SN-C401X-9D-W	2700-12000K	AC100~265V	SMD3030	11W	505*35mm	10*60°	9 pcs

SANNAN

Product features.

- AC100V/265V mains input, no need for switching power supply, constant current IC drive, high effciency,no strobe.Good brightness consistency
- Fire-retardant cover is used to protect electronic components and improve the safety of product use.
- light source SMD3030,encapsulated Epistar 14*28 light-emitting chips three, high brightness, lowlight decay, good color and consistency, long life. Gooduniformity, long service life and good stability.
- Using 10X60 °optical lens, light scattering from two directions, to ensure the uniformity of the light source,no yellow spot.The irradiation distance can be up to 1.5m
- 1.5mm thickness high thermal conductivity aluminumsubstrate, to provide reliable heat dissipation for the lightsource, to improve the life of the product
- Pair connection, high power effciency, easy to install.

LED SIDE LIGHT

SN-C402

LED edge Light Barseries

Product features.

- DC24V low voltage input, safe and reliable, wide range ofapplication.
- High-power constant-current drive ensures LEDbrightness consistency and lamp box uniformity.
- Using Taiwan new century CSP1818 high power LED,good heat dissipation, large current, high reliability.
- Adopt 2.0mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of products.
- Fixed with hard anti-rust screw, never drop when using.environmental protection and maintenance-free.
- An optical lens of 15X45° is adopted to scatter lightfrom both directions, ensuring the uniformity of the lightsource and the absence of yellow spots, and the irradiationdistance is up to3m.

SANNAN







Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C402-6D	6500K	DC24V	CSP1818	15W	300*25mm	300	6 pcs
SN-C402-8D	6500K	DC24V	CSP1818	20W	400*25mm	300	8 pcs
SN-C402-10D	6500K	DC24V	CSP1818	25W	500*25mm	300	10 pcs

SN-C403



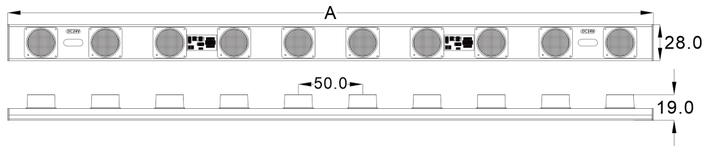

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C403-6D	6500K	DC24V	CSP1818	15W	300*28mm	300	6 pcs
SN-C403-8D	6500K	DC24V	CSP1818	20W	400*28mm	300	8 pcs
SN-C403-10D	6500K	DC24V	CSP1818	25W	500*28mm	300	10 pcs

SANNAN

Product features.

- DC24V low voltage input, safe and reliable, wide range ofapplication.
- High power constant current drive to ensure LEDbrightness consistency and lamp box uniformity.
- Using Taiwan new century CSP1818 high power LED,good heat dissipation, large current, high reliability.
- Adopt 2.0mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of products.
- With an optical lens of 15X45°, the light scatters fromboth directions, ensuring the uniformity of the light source,no macula, and the irradiation distance up to 3m.
- Fixed with hard anti-rust screw, never drop when using,environmental protection and maintenance-free.
- 6063 aviation aluminum profle heat dissipation, siliconewaterproof, effectively solve the problem of waterproofheat dissipation.

LED SIDE LIGHT

SN-C404

LED edge Light Barseries

Product features.

- DC24V low voltage input, safe and reliable, wide range ofapplication.
- Constant current drive ensures LED brightnessconsistency and light box uniformity.
- Using Taiwan new century CSP1818 high power LED,good heat dissipation, large current, high reliability.
- Adopt 2.0mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of the product.
- With an optical lens of 15X45°, the light scatters fromboth directions, ensuring the uniformity of the light source,no macula, and the irradiation distance up to 3m.
- Fixed with hard anti-rust screw, never drop when using,environmental protection and maintenance-free.
- 6063 aviation aluminum profle heat dissipation, siliconewaterproof, effectively solve the problem of waterproofheat dissipation.

SANNAN

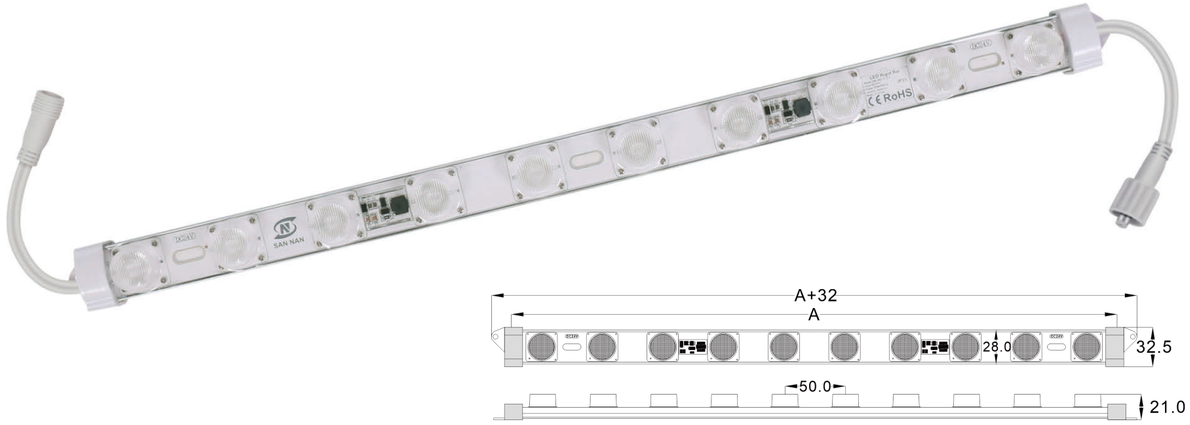

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C404-6D	6500K	DC24V	CSP1818	15W	300*32.5mm	300	6 pcs
SN-C404-8D	6500K	DC24V	CSP1818	20W	400*32.5mm	300	8 pcs
SN-C404-10D	6500K	DC24V	CSP1818	25W	500*32.5mm	300	10 pcs

SN-C405

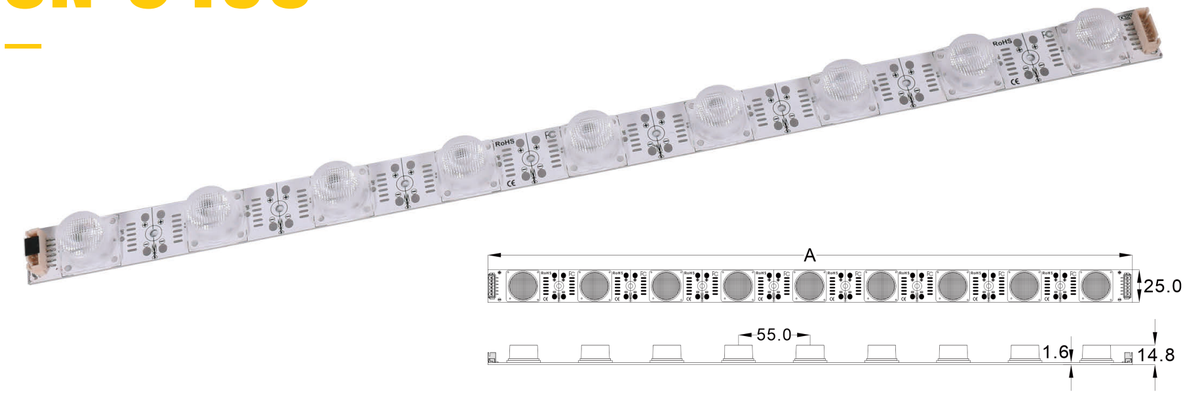

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C405-9D-W	2700-12000K	DC12/24V	SMD3030	13.5W	495*25mm	135	9 pcs
SN-C405-19D-W	2700-12000K	DC12/24V	SMD3030	27W	990*25mm	135	18 pcs
SN-C405-9D-C	2700-12000K	DC12/24V	SMD3030	13.5W	495*25mm	135	9 pcs
SN-C405-18D-C	2700-12000K	DC12/24V	SMD3030	27W	990*25mm	135	18 pcs

SANNAN

Product features.

- DC12V/24V voltage input, safe and reliable, wide rangeof application.
- Constant current drive to ensure LED brightnessconsistency and lamp box uniformity.
- The light source adopts SMD3030, packaging wafer14*28 luminescent chip three, high brightness, low lightdecay, good color, long life, good stability.
- Adopt 1.6mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of products.
- An optical lens of 10X60° is adopted to scatter light fromtwo directions, ensuring the uniformity of the light source,no macula, and the irradiation distance up to 1.5m.

LED SIDE LIGHT

SN-C406

LED edge Light Barseries

Product features.

- DC12/24V voltage input, safe and reliable, wide range ofapplication.
- Constant current drive ensures LED brightnessconsistency and light box uniformity.
- The light source adopts SMD3030, packaging wafer14*28 light emitting chip three, high brightness, low lightdecay, good color, long life, good stability.
- Adopt 1.6mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of the product.
- With an optical lens of 10X60°, light is scattered fromtwo directions to ensure the uniformity of the light source,no macula, and the irradiation distance is up to 1.5m.
- Adopt 6063 aviation aluminum profile for heatdissipation, silicone waterproof, effectively solve theproblem of waterproof heat dissipation.

SANNAN

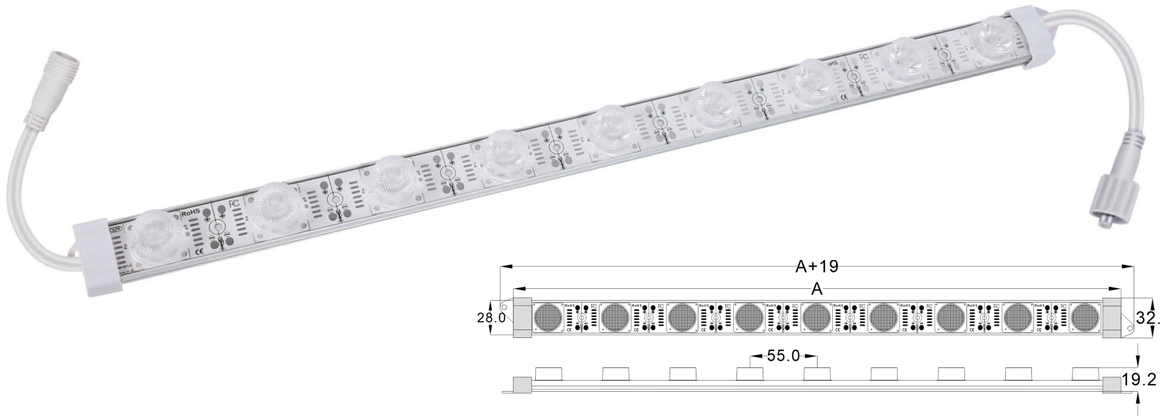

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C406-9D-W	2700-12000K	DC 12/24V	SMD3030	13. 5W	500*32.5mm	135	9 pcs
SN-C406-18D-W	2700-12000K	DC 12/24V	SMD3030	27W	1000*32.5mm	135	18 pcs
SN-C406-9D-C	2700-12000K	DC 12/24V	SMD3030	13. 5W	500*32.5mm	135	9 pcs
SN-C406-18D-C	2700-12000K	DC 12/24V	SMD3030	27W	1000*32.5mm	135	18 pcs

SN-C407

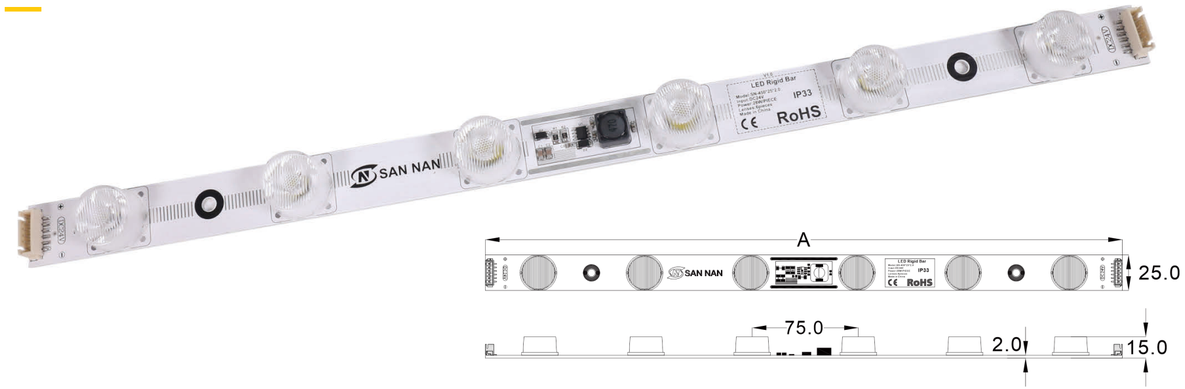

Product Parameter

Part NO.	CCT	VDC	LED Source	W/Piece	Light panel size	lm/Heart	LED Qty
SN-C407-4D	6500K	DC24V	SMS3535	18W	300*25mm	450	4 pcs
SN-C407-5D	6500K	DC24V	SMS3535	22.5W	375*25mm	450	5 pcs
SN-C407-6D	6500K	DC24V	SMS3535	27W	450*25mm	450	6 pcs

SANNAN

Product features.

- DC24V voltage input, safe and reliable, wide range ofapplication.
- High-power constant-current drive ensures LEDbrightness consistency and lamp box uniformity.
- Osram SMD3535 3V 5W high-power LD, good heatdissipation, large current, high reliability.
- Adopt 2.0mm thick and high thermal conductivityaluminum substrate to dissipate heat and improve theservice life of products.
- 10X30° optical lens is adopted to ensure the uniformityof light source and no macula.
- Single lamp 4.5w, ensure high brightness and shootingdistance in the big light box, the irradiation distance up to5m.

LED SIDE LIGHT

Side light bar
Double-sided light box

The ultra-thin double-sided advertising light box with side light-emitting technology, featuring an unparalleled modern style, uniform light effect and space-saving characteristics, has become the preferred solution for commercial space decoration and advertising display at present.













CONTROL SYSTEM



05 Control system

Introduction to control system

The control system is composed of single chip microcomputer and LED driven IC,
which is usually fixed behind theamp board to facilitate the replacement process.A maximum of 10,000 leds
can be controlled in one way, and thecontroler has a maximum of 8 channels,
Svnchronous connection can be made between controllers.

Custom process

01 Customer provides function description(such as indrared induction,remote control switch)

02 Functional quotation according to customer needs

03 Test

04 Customer determines the dunction effect

05 Customer payment

06 Delivery

SN-K501-1

1st main controller

Product parameters

- Part NO. : SN-K501-1
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 4000 LED
- Data type : Out of sync

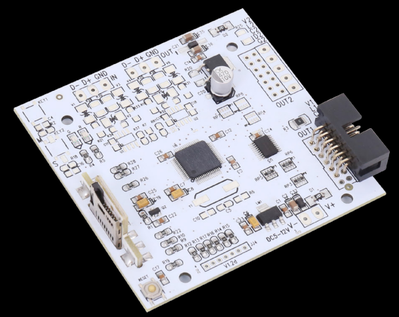

SN-K501-2

1st main controller

Product parameters

- Part NO. : SN-K501-2
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 8000 LED
- Data type : Multiple sync hronizations

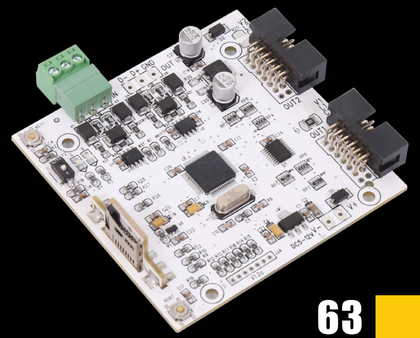

SN-K501-4

1st main controller

Product parameters

- Part NO. : SN-K501-4
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 16000 LED
- Data type : Multiple sync hronizations

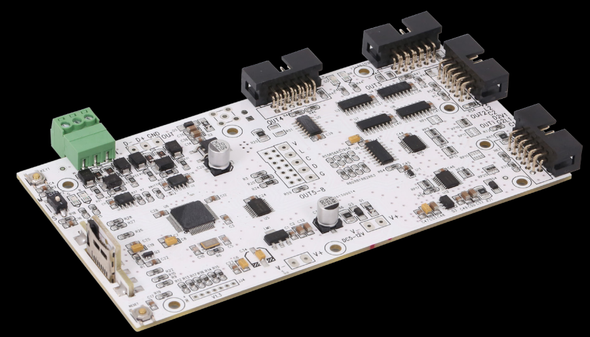

SN-K501-8

1st main controller

Product parameters

- Part NO. : SN-K501-8
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 32000 LED
- Data type : Multiple sync hronizations

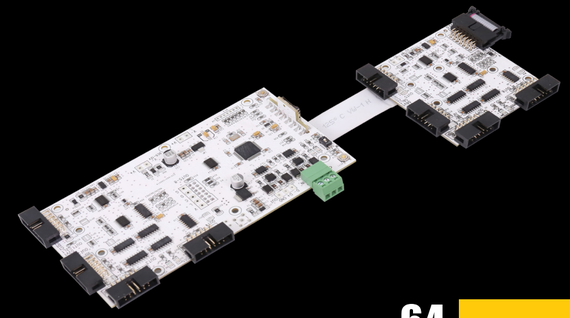

SN-K502-1

1st main controller

Product parameters

- Part NO. : SN-K502-1
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 10000 LED
- Data type : Out of sync

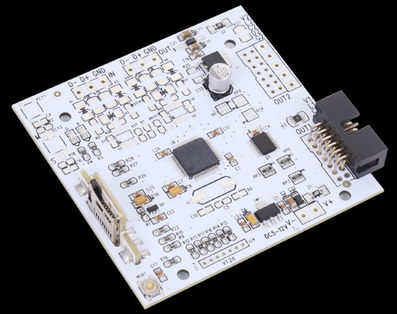

SN-K502-2

1st main controller

Product parameters

- Part NO. : SN-K502-2
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 20000 LED
- Data type : Multiple sync hronizations

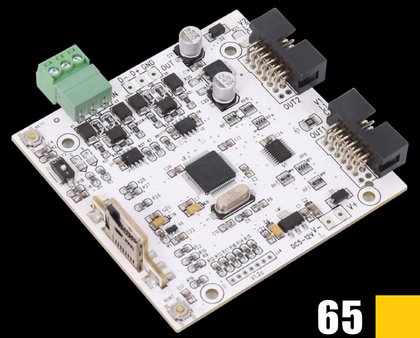

SN-K502-4

1st main controller

Product parameters

- Part NO. : SN-K502-4
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 40000 LED
- Data type : Multiple sync hronizations

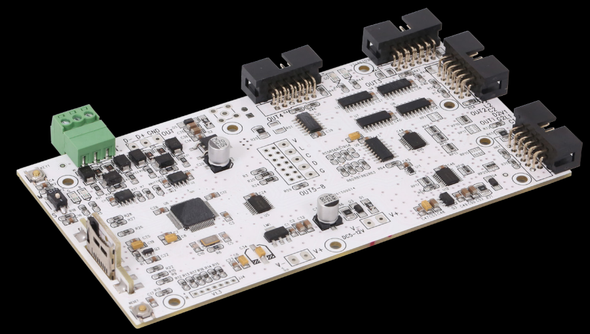

SN-K502-8

1st main controller

Product parameters

- Part NO. : SN-K502-8
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 80000 LED
- Data type : Multiple sync hronizations

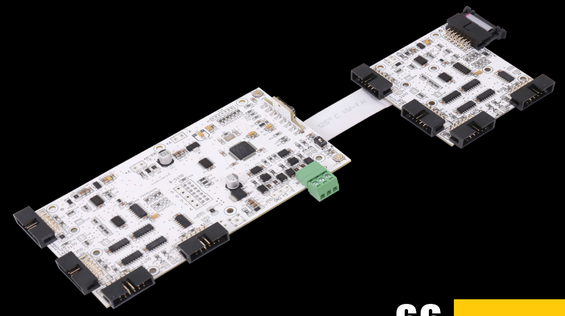

SN-K503-1

1st main controller

Product parameters

- Part NO. : SN-K503-1
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 3000 LED
- Data type : Out of sync

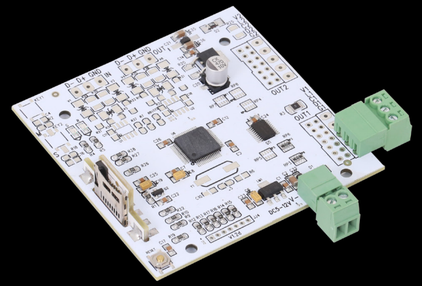

SN-K503-2

1st main controller

Product parameters

- Part NO. : SN-K503-2
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 6000 LED
- Data type : Multiple sync hronizations

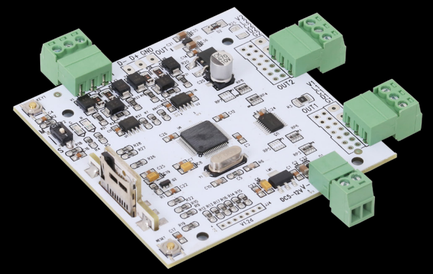

SN-K503-4

1st main controller

Product parameters

- Part NO. : SN-K503-4
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 12000 LED
- Data type : Multiple sync hronizations

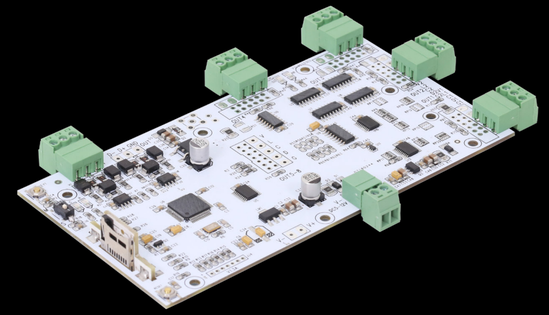

SN-K503-8

1st main controller

Product parameters

- Part NO. : SN-K503-8
- Data storage : TF Storage Card
- Unit : 1pcs
- Number : 24000 LED
- Data type : Multiple sync hronizations

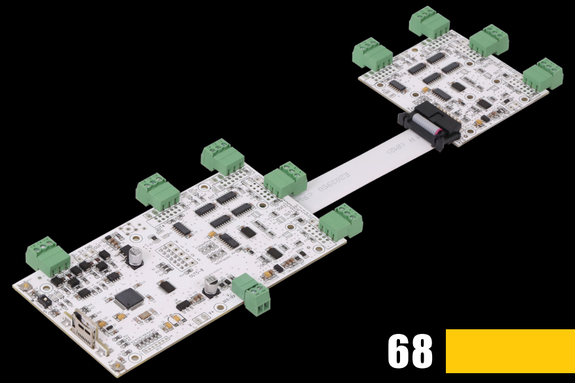



- Quality Assurabce
- Powerful Manufacturel
- Excellent Team
- Customized Services
- Strong Productivity

Our advantages

CONTACT US

06 Project case

LED light box effect display

Email: Kiki@szsnled.com

Phone: +8618576729248

https://www.snkjcn.com/

Shenzhen SanNan technology co., ltd. is a high-tech enterprise committed to the research and development, production, sales and service innovation of LED light box lighting, LED indoor and outdoor decorative lighting,LED intelligent control and other products.

LED light box
Effect display

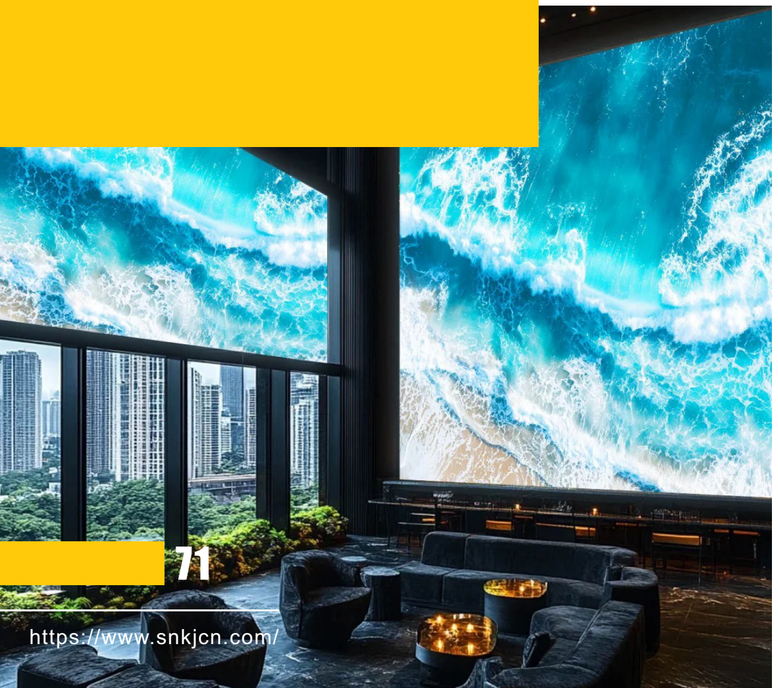

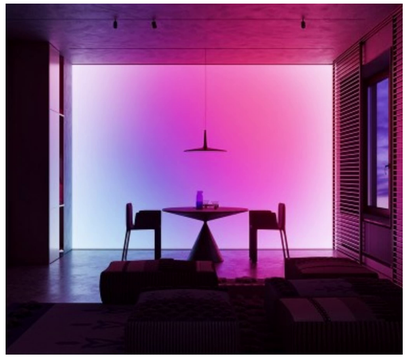

Customized soft screen display



Front desk waterfall dynamic light box

Customized lighting installations featuring LED light strips/screens, control programs and creative structures. The core visual experience simulates the flowing sensation of water like a waterfall cascading from top to bottom. However, through program control, multiple dynamic modes can be achieved, far beyond just the "waterfall" effect.





SANNAN

Bar counter
RGB dynamic light box

The highly atmospheric and commercially valuable creative design
can instantly transform an ordinary bar area into the core visual focal point,
significantly enhancing the style,
vitality and guest experience of the space.

Bar counter
RGB dynamic light box

The highly atmospheric and commercially valuable creative design
can instantly transform an ordinary bar area into the core visual focal point,
significantly enhancing the style,
vitality and guest experience of the space.













SANNAN

Reception hall dynamic light box

It is the silent spokesperson for the corporate image,
the creator of the spatial atmosphere, and the guiding visual beacon for visitors.
A well-designed light box can significantly enhance the texture
and professionalism of the space.

SANNAN

Dual-color temperature adjustable light box

This is a lighting solution that is becoming increasingly popular in professional and high-end business settings. It precisely controls and alters the atmosphere of the space by adjusting the color temperature of the light box.

















SANNAN

Store display Light box

An indispensable visual marketing tool in modern commercial spaces.
It is not merely a lighting device; rather, it is the "eyes" of the brand. It can actively attract customers, tell the brand story, and ultimately drive consumption both during the day and at night.

SANNAN

Store display Light box

An indispensable visual marketing tool in modern commercial spaces. It is not merely a lighting device; rather, it is the "eyes" of the brand. It can actively attract customers, tell the brand story, and ultimately drive consumption both during the day and at night.









SANNAN

Commercial street Decorative light boxes

Decorative light boxes are one of the most dynamic visual elements in the modern urban commercial ecosystem. They have long transcended their basic lighting function and evolved into the core carrier for shaping the image of a neighborhood, attracting consumer traffic, and conveying commercial culture. They are the "soul" and "expression" of a commercial street.





ULTRA-THIN LIGHT BOX

07 Ultra-thin light box

Introduction to the Drawing Light Box

Ultra-thin projection light box

Ultra-thin as a mobile phone - 10mm bezelGlass panel remains flat, resistant to scratches and does not yellowQuick and easy to change pictures by pullingLED light source is energy-saving and power-efficient
Two colors are available for selection.

Desktop light box

The desktop light box is made with a clean and exquisite appearance, integrated with exquisite craftsmanship. It is lightweight and aesthetically pleasing. With an 8-hour battery life, it does not require charging. The battery capacity is 10,000 milliampere-hours.

Ultra-thin projection light box

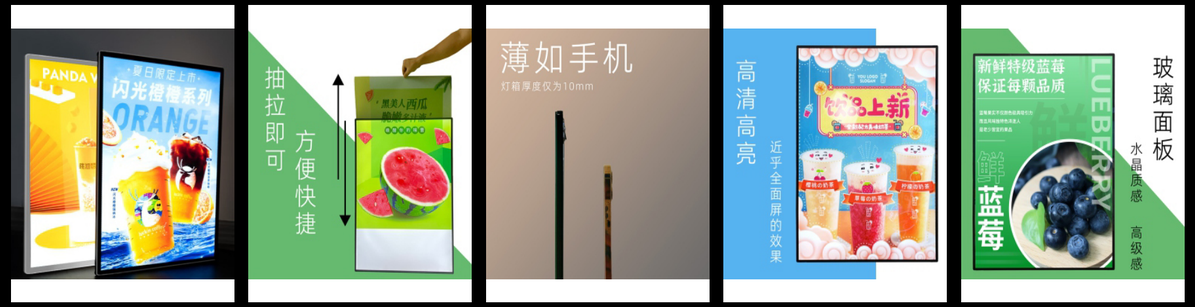

One pull, one stretch Seconds turn into pictures



A0 A1 A2 A3 A4



Product Parameter

Name	A4	A3	A2	A1	Size	Size	Size	Size	Size	Size
Production specifications	225*304mm	311*427mm	435*600mm	605*850mm	500*700mm	600*900mm	600*120mm	750*120mm	300*1200mm	600*1200mm(3mm glass)
Poster size	210*297mm	297*420mm	420*594mm	594*841mm	485*693mm	589*895mm	589*1195mm	739*1195mm	289*1195mm	589*1195mm

USAGE SCENARIO



Canteen

Cinema

Bazaar

Hotel

Shop

Ultra-thin projection light box

Ultra-thin as a mobile phone - 10mm bezelGlass panel remains flat, resistant to scratches and does not yellowQuick and easy to change pictures by pullingLED light source is energy-saving and power-efficient Two colors are available for selection.

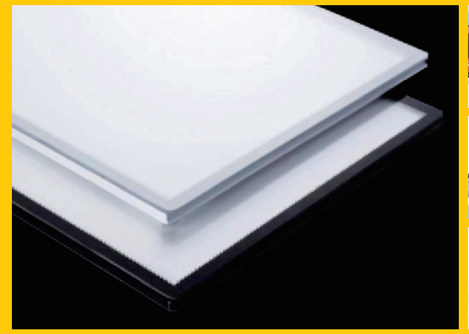







Additional accessories



Adjustable boom



Receptacle bracket



Double-pole vertical support structure



Wall-mounted accessories

USAGE SCENARIO



SANNAN

Desktop light box

The desktop light box is made with a clean and exquisite appearance, integrated with exquisite craftsmanship.
It is lightweight and aesthetically pleasing.
With an 8-hour battery life, it does not require charging.
The battery capacity is 10,000 milliampere-hours.



It's easy to replace the inner page. Just pull out the base and slide out the inner page. It's convenient, fast and efficient.



Recharge Plug in

Product Parameter

Name	Data	Data	Data
Model	A4 (Plug in)	A4 (Recharge)	A5 (Recharge)
Weight	1.1 KG	1.3 KG	0.65 KG





OUTDOOR
LIGHT BOX

07 Outdoor light box

A variety of outdoor light boxes are available for your choice.

Rotating light box

1. Built-in motor, capable of 360-degree rotation.
2. Dual-sided content can showcase various aspects of the store.
3. More eye-catching than ordinary light boxes.







Flat light box

1. Aluminum alloy material
2. Double-sided design for better display of your images
3. Lens LED strip, energy-saving and high-definition
4. Simple design suitable for various specialty stores









Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Aluminum alloy, acrylic	Foam + Carton	logo, packaging, color

SANNAN

Shrink film light box

1. Low voltage, safe, energy-saving, low heat generation
2. Adopt high-quality aluminum alloy frame
3. Thickened material, strong load-bearing capacity











Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Aluminum alloy, acrylic	Foam + Carton	logo, packaging, color

SANNAN

Effect demonstration











Square rotating light box

1. Suspension and vertical multi-level assembly mode
2. One display case can show multiple images, and the imagescan be changed at will
3. 360-degree rotation, unique and eye-catching
4. Can be used indoors and outdoors

Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Aluminum alloy, acrylic	Foam + Carton	logo, packaging, color

Outdoor light box Effect display













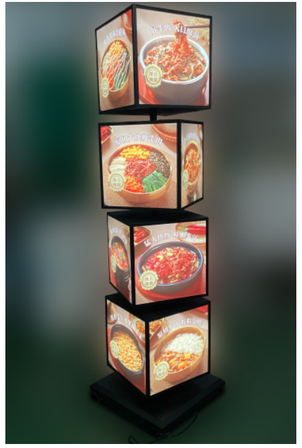

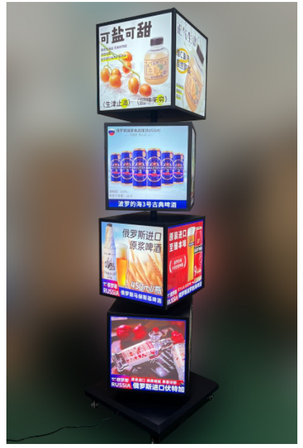





07 Indoor light box

A variety of light box options











INDOOR LIGHT BOX

SANNAN

Acrylic edgeless rotating light box

1. Acrylic without frame
2. 360-degree rotation
3. Five-sided content









Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Metal | acrylic	Foam + Carton	logo, packaging, color

SANNAN

Acrylic light box

1. The UV-printed acrylic patterns are clear and do not fade easily.
2. The brightness is uniform and the color temperature can be customized.
3. It supports the customization of various special shapes and colors.











Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Aluminum alloy, acrylic	Foam + Carton	logo, packaging, color

SANNAN

Crystal light box

1. Acrylic transparent frame
2. LED lights with high brightness and energy-saving feature
3. Posters can be replaced at will (printing service available)
4. Customized size available





Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	acrylic	Foam + Carton	logo, packaging, color

SANNAN

Soft film Light box

1. Various styles, customizable at will
2. High-definition picture, using high-quality UV soft film
3. Without frame, wide field of vision
4. High-precision 45-degree cutting for angle assembly, quality guaranteed

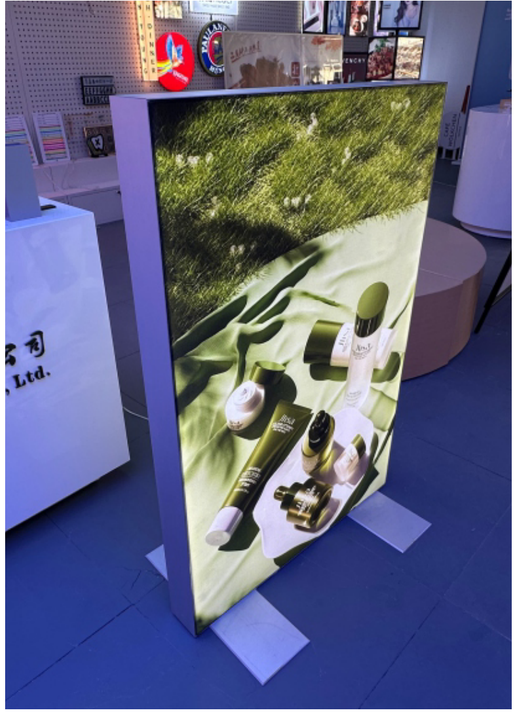





Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	aluminum frame	Foam + Carton	Soft film poster

SANNAN

Magnetic Light box

1. Lift the transparent panel with an suction cup to change the picture.
2. Aluminum alloy frame, customizable for landscape or portrait orientation.
3. Bright, uniform, and gentle light without being dazzling.
4. Rounded corners do not hurt the hands.



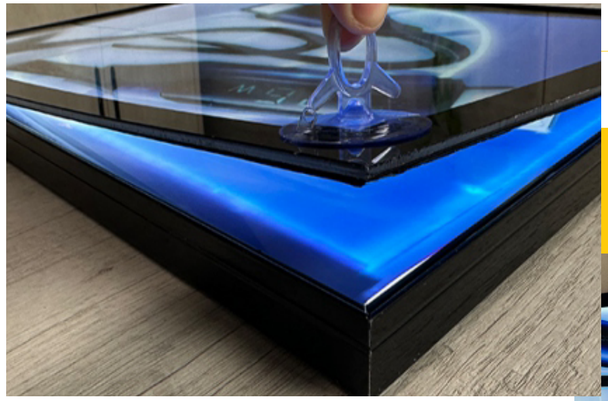



Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	aluminum frame	Foam + Carton	Soft film poster

SANNAN

Recessed ultra-thin light box

1. Thickness: 2-3 cm, light weight, ultra-thin and aesthetically pleasing.
2. Four-sided opening design for easy picture replacement.
3. Able to change posters at will.
4. Seamless connection at 45-degree angle, exquisite and smooth.





Product Parameter

Minimum order quantity	Date of delivery	Authentication	Materials	Packaging	Custom-made
1 set	3 ~ 7 days	CE/RoHS/ISO/EMC	Acrylic + aluminum frame	Foam + Carton	Soft film poster





luminous
Character

07 luminous Character

Here are more elegant styles for you to choose from.



Large-sized characters
Bulb-shaped letters



Jelly word

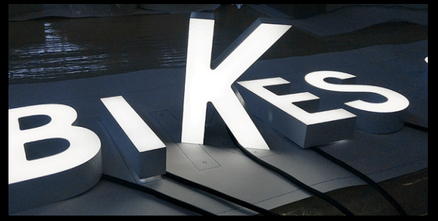

Thousand-layer mirror illuminated letters

Product parameters

Features: Neon lights + Side lighting
Application: Indoor
Material: 3D printing / Stainless steel + Neon lights
Customization: Logo / Color / Size
Certification: CE / RoHS / ISO / EMC



Backlit letters

Use light to illuminate your words

Product parameters

Features: Backlight
Delivery time: 3-7 days
Material: Metal + Acrylic
Application: Outdoor or Indoor



Mini characters

Use light to illuminate your words

Product parameters

Features: Direct illumination + Backlighting
Material: Acrylic
Application: Indoor
Customization: Logo/Color/Size



Backlit letters

Customized effect version

Product parameters

Customizable: Logo/Color/Size
Certificates: CE/RoHS/ISO/EMC
Packaging: Foam + Carton



Acrylic full-body characters

Use light to illuminate your words

Product parameters

Features: Entirely luminous
Material: Acrylic
Application: Indoor
Customization: Logo/Color/Size



3D Printed Characters

Use light to illuminate your words

Product parameters

Features: Front + Side Lights
Material: 3D Printing + Acrylic
Application: Indoor
Customization: Logo/Color/Size



Flat light-emitting signs

Customized effect version

Product parameters

Features: Emit light directly
Applicable environments: Outdoor or indoor
Delivery time: 3-7 days
Material: Aluminum/Stainless steel + Acrylic
Customization: Logo/Color/Size
Packaging: Foam + Carton
Certificates: CE/RoHS/ISO/EMC

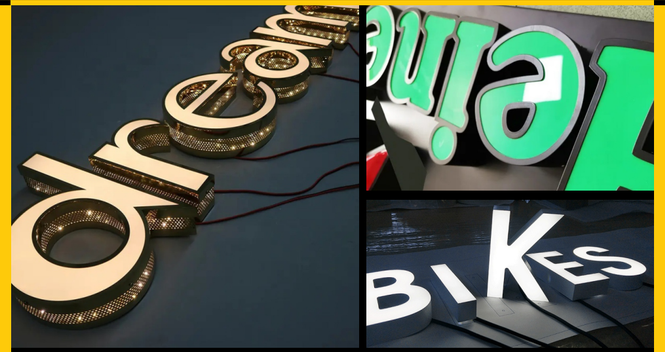

Stainless steel letters

Give texture to the words

Product parameters

Features: Gloss-free
Material: Stainless steel
Applications: Outdoor or indoor
Customization: Logo/Color/Size



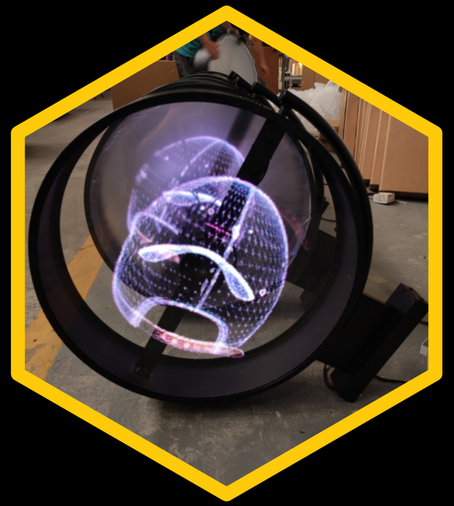



07 3D Holographic projection Light box

Holographic projection full-view 3D lightbox











Feature: 3D Stereoscopic
Material: Aluminum alloy
Applicable to: outdoor or indoor
Customization: patterns / colors / sizes / frames







HOLOGRAPHIC FAN

3D HOLOGRAPHIC PROJECTION LIGHT BOX